

CM INDUSTRIES

INC.

MANUFACTURER OF WELDING PRODUCTS



2025 ***PRODUCT CATALOG***

CM Industries, Inc.
505 Oakwood Rd. Lake Zurich, IL 60047 USA
ph: 847-550-0033 fx: 847-550-0444
email: sales@cmindustries.com www.cmindustries.com

About CM Industries

What we do:

For over 20 years, CM Industries has been a trusted leader in manufacturing high-performance robotic MIG torches, MIG guns, and consumables. Our commitment to quality ensures superior durability and efficiency for all your welding needs.

Our goal:

At CM Industries, we empower distributors by providing top-tier welding products with industry-leading turnaround times. Our dedicated customer service team is always available to offer expert support tailored to your welding challenges.

**We live up to our promise of
unparalleled service**



AMERICAN MADE WELDING PRODUCTS

ROBOTICS & PERIPHERALS



Driven by Performance

CM INDUSTRIES[®] INC.



505 Oakwood Road, Suite 120
Lake Zurich, IL 60047 USA

PRODUCTS

- **MIG Replacement Parts**
- **Semi-Automatic MIG Guns**
- **Push-Pull MIG Guns**
- **Smoke Extractor MIG Guns**
- **Automatic MIG Torches**
- **Robotic MIG Torches**
- **Nozzle Cleaning Stations**
- **TIG Torches and Parts**
- **Water Coolers**



sales@cmindustries.com

Phone: 847-550-0033

cmindustries.com



Table of Contents

TIG Torches and Parts

Torch #9.....	2-3
Torch #17.....	4-5
Torch #18.....	6-7
Torch #20.....	8-9
Torch #22.....	10-11
Torch #24.....	12-13
Torch #26.....	14-15
Torch #12.....	16
Torch #27.....	17
Torch #25.....	18
Accessory Kits.....	19
Water Coolers.....	20

9 Series TIG Torch

125 AMP Air-Cooled

#	Part #	Description		
1	9	Torch Body		
2	9V	Torch Body, w/ Valve		
3	9F	Torch Body, Flex Head		
4	9FV	Torch Body, Flex w/ Valve		
5	9P	Torch Body, Pencil		
6	598882	Gasket/Insulator		
7	41V24	Back Cap, Long		
8	41V35	Back Cap, Medium		
9	41V33	Back Cap, Short		
10	98W18	O-Ring, Back Cap		
11	VS-2	Valve Stem		
12	CC-3-10	Cable Cover, 3"x10'		
	CC-3-22	Cable Cover, 3"x22'		
13	57Y01-2	Power Cable, 12.5' 2pc		
	57Y03-2	Power Cable, 25' 2 pc		
14	57Y01R	Power Cable, 12.5' Rubber		
	57Y03R	Power Cable, 25' Rubber		
15	See Chart	Collet		
16	See Chart	Collet Body		
17	See Chart	Nozzle		
18	See Chart	Nozzle		
19	See Chart	Nozzle		
20	H-100R	Handle, Ribbed		
21	H-100	Handle, Textured		
22	BS-1	Boot Switch, Rubber		
23	DI-917F	Dinse 50mm, w /In-Line Gas Hole		
24	DP-25M	Dinse 25mm		
25	DP-50M	Dinse 50mm		
26	DA-917F	Dinse 50mm, w/ 13" Gas Hose		
27	DA-917FS	Dinse 25mm, w/ 18" Aux. Hose		
28	105Z57	Power Cable Adapter		

9 Series Torch Packages, 125 Amp

Part #	Description	Part #	Description
9	Torch Body, 125 Amp	9P	Torch Body, 125 Amp Pencil 180°
9-12-2	Torch Pkg. 125 Amp 12.5', 2 Pc.	9P-12-2	Torch Pkg. 125 Amp 12.5', 180°, 2 Pc.
9-12-R	Torch Pkg. 125 Amp 12.5', Rubber	9P-12-R	Torch Pkg. 125 Amp 12.5', 180°, Rubber
9-25-2	Torch Pkg. 125 Amp 25', 2 Pc.	9P-25-2	Torch Pkg. 125 Amp 25', 180°, 2 Pc.
9-25-R	Torch Pkg. 125 Amp 25', Rubber	9P-25-R	Torch Pkg. 125 Amp 25', 180°, Rubber
9F	Torch Body, 125 Amp Flex-Head	9V	Torch Body, 125 Amp w/ Valve
9F-12-2	Torch Pkg. 125 Amp 12.5', Flex-Head, 2 Pc.	9V-12-2	Torch Pkg. 125 Amp 12.5', w/ Valve, 2 Pc.
9F-12-R	Torch Pkg. 125 Amp 12.5', Flex-Head, Rubber	9V-12-R	Torch Pkg. 125 Amp 12.5', w/ Valve, Rubber
9F-25-2	Torch Pkg. 125 Amp 25', Flex-Head, 2 Pc.	9V-25-2	Torch Pkg. 125 Amp 25', w/ Valve, 2 Pc.
9F-25-R	Torch Pkg. 125 Amp 25', Flex-Head, Rubber	9V-25-R	Torch Pkg. 125 Amp 25', w/ Valve, Rubber
9FV	Torch Body, 125 Amp Flex-Head w/ Valve		
9FV-12-2	Torch Pkg. 125 Amp 12.5', Flex-Head w/ Valve, 2 Pc.		
9FV-12-R	Torch Pkg. 125 Amp 12.5', Flex-Head w/ Valve, Rubber		
9FV-25-2	Torch Pkg. 125 Amp 25', Flex-Head w/ Valve, 2 Pc.		
9FV-25-R	Torch Pkg. 125 Amp 25', Flex-Head w/ Valve, Rubber		

Standard Set-Up



Optional Nozzles



Small Gas Lens Set-Up



Large Stubby Gas Lens Set-Up



Electrode Diameter			.020" (0.5mm)	.040" (1.0mm)	1/16" (1.6mm)	3/32" (2.4mm)	1/8" (3.2mm)	5/32" (4.0mm)
Nozzle Size	#	#3 (3/16")	#4 (1/4")	#5 (5/16")	#6 (3/8")	#7 (7/16")	#8 (1/2")	#10 (5/8")
Standard Set-Up								
Gasket Insulator	6		598882	598882	598882	598882	598882	
Collet	14		13N20	13N21	13N22	13N23	13N24	
Collet Body	15		13N25	13N26	13N27	13N28	13N29	
Alumina Nozzle Standard	16		13N08	13N09	13N10	13N11	13N12	13N13
Alumina Nozzle Long	17	A796F70	A796F71	A796F72	A796F73			
Alumina Nozzle Extra Long	18	A796F74	A796F75	A796F76	A796F77			
Small Gas Lens Set-Up								
Gasket Insulator	6		598882	598882	598882	598882	598882	
Collet	15		13N20	13N21	13N22	13N23	13N24	
Gas Lens Collet Body	29		45V41	45V42	45V43	45V44	45V45	
Alumina Nozzle Gas Lens	30		53N58	53N59	53N60	53N61	53N61S	
Large Stubby Gas Lens Set-Up								
Gasket Insulator	31		54N63-20	54N63-20	54N63-20	54N63-20	54N63-20	
Gas Lens Collet	32		13N20L	13N21L	13N22L	13N23L	13N24L	
Gas Lens Collet Body	33		45V0204S	45V0204S	45V116S	45V64S	995795S	
Alumina Nozzle Gas Lens	34				57N75		57N74	53N88
							#12 (3/4")	53N87
							#15 (15/16")	53N89

17 Series TIG Torch

150 AMP Air-Cooled

#	Part #	Description
1	17	Torch Body
2	17V	Torch Body, w/ Valve
3	17F	Torch Body, Flex Head
4	17FV	Torch Body, Flex w/ Valve
5	18CG	Gasket/Insulator
6	18-7	Back Insulator
7	57Y02	Back Cap, Long
8	300M	Back Cap, Medium
9	57Y04	Back Cap, Short
10	98W18	O-Ring, Back Cap
11	VS-2	Valve Stem
12	CC-3-10 CC-3-22	Cable Cover, 3"x10' Cable Cover, 3"x22'
13	57Y01-2 57Y03-2	Power Cable, 12.5' 2 pc Power Cable, 25' 2 pc
14	57Y01R 57Y03R	Power Cable, 12.5' Rubber Power Cable, 25' Rubber
15	See Chart	Collet
16	See Chart	Collet Body
17	See Chart	Nozzle
18	See Chart	Nozzle
19	H-100R	Handle, Ribbed
20	H-100	Handle, Textured
21	BS-1	Boot Switch, Rubber
22	DI-917F	Dinse 50mm, w /In-Line Gas Hole
23	DP-25M	Dinse 25mm
24	DP-50M	Dinse 50mm
25	DA-917F	Dinse 50mm, w/ 18" Gas Hose
26	DA-917FS	Dinse 25mm, w/ 18" Gas Hose
27	105Z57	Power Cable Adapter



17 Series Torch Packages, 150 Amp

Part #	Description
17	Torch Body, 150 Amp
17-12-2	Torch Pkg. 150 Amp 12.5', 2 Pc.
17-12-R	Torch Pkg. 150 Amp 12.5', Rubber
17-25-2	Torch Pkg. 150 Amp 25', 2 Pc.
17-25-R	Torch Pkg. 150 Amp 25', Rubber
17F	Torch Body, 150 Amp Flex-Head
17F-12-2	Torch Pkg. 150 Amp 12.5', Flex-Head, 2 Pc.
17F-12-R	Torch Pkg. 150 Amp 12.5', Flex-Head, Rubber
17F-25-2	Torch Pkg. 150 Amp 25', Flex-Head, 2 Pc.
17F-25-R	Torch Pkg. 150 Amp 25', Flex-Head, Rubber

Part #	Description
17FV	Torch Body, 150 Amp Flex-Head w/ Valve
17FV-12-2	Torch Pkg. 150 Amp 12.5', Flex-Head w/ Valve, 2 Pc.
17FV-12-R	Torch Pkg. 150 Amp 12.5', Flex-Head w/ Valve, Rubber
17FV-25-2	Torch Pkg. 150 Amp 25', Flex-Head w/ Valve, 2 Pc.
17FV-25-R	Torch Pkg. 150 Amp 25', Flex-Head w/ Valve, Rubber
17V	Torch Body, 150 Amp w/ Valve
17V-12-2	Torch Pkg. 150 Amp 12.5', w/ Valve, 2 Pc.
17V-12-R	Torch Pkg. 150 Amp 12.5', w/ Valve, Rubber
17V-25-2	Torch Pkg. 150 Amp 25', w/ Valve, 2 Pc.
17V-25-R	Torch Pkg. 150 Amp 25', w/ Valve, Rubber

Standard Set-Up



Medium Gas Lens Set-Up



Large Gas Lens Set-Up



Stubby Collet Body Set-Up



Electrode Diameter		.020" (0.5mm)	.040" (1.0mm)	1/16" (1.6mm)	3/32" (2.4mm)	1/8" (3.2mm)	5/32" (4.0mm)	
Nozzle Size	#	#4 (1/4")	#5 (5/16")	#6 (3/8")	#7 (7/16")	#8 (1/2")	#10 (5/8")	#12 (3/4")
Standard Set-Up								
Gasket Insulator	5	18CG	18CG	18CG	18CG	18CG	18CG	
Collet	15	10N21	10N22	10N23	10N24	10N25	54N20	
Collet Body	16	10N29	10N30	10N31	10N32	10N28	406488	
Alumina Nozzle	17	10N50	10N49	10N48	10N47	10N46	10N45	10N44
Alumina Nozzle Long	18		10N49L	10N48L	10N47L			
Medium Gas Lens Set-Up								
Gasket Insulator	28	54N01	54N01	54N01	54N01	54N01	54N01	
Gas Lens	29	45V29	45V24	45V25	45V26	45V27	45V28	
Alumina Nozzle, Gas Lens	30	54N18	54N17	54N16	54N15	54N14	54N19	
Alumina Nozzle Long, Gas Lens	31		54N17L	54N16L	54N15L	54N14L		
Large Stubby Gas Lens Set-Up								
Gasket Insulator	32	54N63	54N63	54N63	54N63	54N63	54N63	
Lg. Gas Lens	33	45V0204	45V0204	45V116	45V64	995795	45V63	53N87 (#12)
Alumina Nozzle, Lg. Gas Lens	34			57N75		57N74	53N88	53N89 (#15)
Alumina Nozzle Long, Lg. Gas Lens				57N75L		57N74L	53N88L	53N87L
Alumina Nozzle Extra Long, Lg. Gas Lens				57N75XL		57N74XL	53N88XL	53N87XL
Stubby Collet Body Set-Up								
Gasket Insulator	35	18CG20	18CG20	18CG20	18CG20	18CG20		
Stubby Collet	36	10N21S	10N22S	10N23S	10N24S	10N25S		
Stubby Collet Body	37	17CB20	17CB20	17CB20	17CB20	17CB20		
Alumina Nozzle	38	13N08	13N09	13N10	13N11	13N12	13N13	

18 Series TIG Torch

350 AMP Water-Cooled

#	Part #	Description
1	18	Torch Body
2	18F	Torch Body, Flex Head
3	18V	Torch Body, w/ Valve
4	18FV	Torch Body, Flex w/ Valve
5	18P	Torch Body, Pencil
6	18CG	Gasket/Insulator
7	18-7	Back Insulator
8	57Y04	Back Cap, Short
9	300M	Back Cap, Medium
10	57Y02	Back Cap, Long
11	98W18	O-Ring, Back Cap
12	VS-2	Valve Stem
13	53N04	Hose Clamp
14	40V64R	Power Cable, 12.5' Rubber
	41V29R	Power Cable, 25' Rubber
15	40V74R	Water Hose, 12.5' Rubber
	41V32R	Water Hose, 25' Rubber
16	40V75R	Gas Hose, 12.5' Rubber
	41V30R	Gas Hose, 25' Rubber
17	40V64	Power Cable, 12.5' Vinyl
	41V29	Power Cable, 25' Vinyl
18	40V74	Water Hose, 12.5' Vinyl
	41V32	Water Hose, 25' Vinyl
19	40V75	Gas Hose, 12.5' Vinyl
	41V30	Gas Hose, 25' Vinyl
20	See Chart	Collet
21	See Chart	Collet Body
22	See Chart	Nozzle
23	See Chart	Nozzle
24	CC-3-10	Cable Cover, 3"x10'
	CC-3-22	Cable Cover, 3"x22'
	CC-4-10	Cable Cover, 4"x10'
	CC-4-22	Cable Cover, 4"x22'
25	H-200	Handle, Textured
26	H-200R	Handle, Ribbed
27	18PB	Barrel (18P)
28	DA-1820L	Dinse 50mm, w/ 18" Water Hose
29	45V11	Power Cable Adapter



18 Series Torch Packages, 350 Amp

Part #	Description	Part #	Description
18	Torch Body, 350 Amp	18P	Torch Body, 350 Amp Pencil 180°
18-12	Torch Pkg. 350 Amp 12.5'	18P-12	Torch Pkg. 350 Amp 12.5', 180°
18-12-R	Torch Pkg. 350 Amp 12.5', Rubber	18P-12-R	Torch Pkg. 350 Amp 12.5', 180°, Rubber
18-25	Torch Pkg. 350 Amp 25'	18P-25	Torch Pkg. 350 Amp 25', 180°
18-25-R	Torch Pkg. 350 Amp 25', Rubber	18P-25-R	Torch Pkg. 350 Amp 25', 180°, Rubber
18F	Torch Body, 350 Amp Flex-Head	18V	Torch Body, 350 Amp w/ Valve
18F-12	Torch Pkg. 350 Amp 12.5', Flex-Head	18V-12	Torch Pkg. 350 Amp 12.5', w/ Valve
18F-12-R	Torch Pkg. 350 Amp 12.5', Flex-Head, Rubber	18V-12-R	Torch Pkg. 350 Amp 12.5', w/ Valve, Rubber
18F-25	Torch Pkg. 350 Amp 25', Flex-Head	18V-25	Torch Pkg. 350 Amp 25', w/ Valve
18F-25-R	Torch Pkg. 350 Amp 25', Flex-Head, Rubber	18V-25-R	Torch Pkg. 350 Amp 25', w/ Valve, Rubber
18FV	Torch Body, 350 Amp Flex-Head w/ Valve		
18FV-12	Torch Pkg. 350 Amp 12.5', Flex-Head w/ Valve		
18FV-12-R	Torch Pkg. 350 Amp 12.5', Flex-Head w/ Valve, Rubber		
18FV-25	Torch Pkg. 350 Amp 25', Flex-Head w/ Valve		
18FV-25-R	Torch Pkg. 350 Amp 25', Flex-Head w/ Valve, Rubber		

Standard Set-Up



Medium Gas Lens Set-Up



Large Gas Lens Set-Up



Stubby Collet Body Set-Up



Electrode Diameter		.020" (0.5mm)	.040" (1.0mm)	1/16" (1.6mm)	3/32" (2.4mm)	1/8" (3.2mm)	5/32" (4.0mm)	
Nozzle Size	#	#4 (1/4")	#5 (5/16")	#6 (3/8")	#7 (7/16")	#8 (1/2")	#10 (5/8")	#12 (3/4")
Standard Set-Up								
Gasket Insulator	6	18CG	18CG	18CG	18CG	18CG	18CG	
Collet	20	10N21	10N22	10N23	10N24	10N25	54N20	
Collet Body	21	10N29	10N30	10N31	10N32	10N28	406488	
Alumina Nozzle	22	10N50	10N49	10N48	10N47	10N46	10N45	10N44
Alumina Nozzle Long	23	10N50L	10N49L	10N48L	10N47L			
Medium Gas Lens Set-Up								
Gasket Insulator	28	54N01	54N01	54N01	54N01	54N01	54N01	
Gas Lens	29	45V29	45V24	45V25	45V26	45V27	45V28	
Alumina Nozzle, Gas Lens	30	54N18	54N17	54N16	54N15	54N14	54N19	
Alumina Nozzle Long, Gas Lens	31		54N17L	54N16L	54N15L	54N14L		
Large Stubby Gas Lens Set-Up								
Gasket Insulator	32	54N63	54N63	54N63	54N63	54N63	54N63	
Lg. Gas Lens	33	45V0204	45V0204	45V116	45V64	995795	45V63	53N87 (#12)
Alumina Nozzle, Lg. Gas Lens	34			57N75		57N74	53N88	53N89 (#15)
Alumina Nozzle Long, Lg. Gas Lens				57N75L		57N74L	53N88L	53N87L
Alumina Nozzle Extra Long, Lg. Gas Lens				57N75XL		57N74XL	53N88XL	53N87XL
Stubby Collet Body Set-Up								
Gasket Insulator	35	18CG20	18CG20	18CG20	18CG20	18CG20		
Stubby Collet	36	10N21S	10N22S	10N23S	10N24S	10N25S		
Stubby Collet Body	37	17CB20	17CB20	17CB20	17CB20	17CB20		
Alumina Nozzle	38	13N08	13N09	13N10	13N11	13N12	13N13	

20 Series TIG Torch

250 AMP Water-Cooled

#	Part #	Description
1	20	Torch Body
	20HP	Torch Body, Hard Plastic
2	20V	Torch Body, w/ Valve
3	20F	Torch Body, Flex Head
4	20FV	Torch Body, Flex w/ Valve
5	20P	Torch Body, Pencil
6	598882	Gasket/Insulator
7	41V24	Back Cap, Long
8	41V35	Back Cap, Medium
9	41V33	Back Cap, Short
10	98W77	O-Ring, Back Cap
11	VS-2	Valve Stem
12	CC-3-10	Cable Cover, 3"x10'
	CC-3-22	Cable Cover, 3"x22'
13	53N04	Hose Clamp
14	45V03R	Power Cable, 12.5' Rubber
	45V04R	Power Cable, 25' Rubber
15	45V07R	Water Hose, 12.5' Rubber
	45V08R	Water Hose, 25' Rubber
16	45V09R	Gas Hose, 12.5' Rubber
	45V10R	Gas Hose, 25' Rubber
17	45V03	Power Cable, 12.5' Vinyl
	45V04	Power Cable, 25' Vinyl
18	45V07	Water Hose, 12.5' Vinyl
	45V08	Water Hose, 25' Vinyl
19	45V09	Gas Hose, 12.5' Vinyl
	45V10	Gas Hose, 25' Vinyl
20	See Chart	Collet
21	See Chart	Collet Body
22	See Chart	Nozzle
23	See Chart	Nozzle
24	See Chart	Nozzle
25	H-100	Handle, Textured
	53N06	Handle, Textured Thread-On
26	H-100R	Handle, Ribbed
	53N06R	Handle, Ribbed Thread-On
27	BS-1	Boot Switch, Rubber
28	DA-1820L	Dinse 50mm, w/ 18" Water Hose
29	45V11	Power Cable Adapter



20 Series Torch Packages, 250 Amp

Part #	Description
20	Torch Body, 250 Amp
20-12	Torch Pkg. 250 Amp 12.5', Vinyl
20-12-R	Torch Pkg. 250 Amp 12.5', Rubber
20-25	Torch Pkg. 250 Amp 25', Vinyl
20-25-R	Torch Pkg. 250 Amp 25', Rubber
20F	Torch Body, 250 Amp Flex-Head
20F-12	Torch Pkg. 250 Amp 12.5', Flex-Head, Vinyl
20F-12-R	Torch Pkg. 250 Amp 12.5', Flex-Head, Rubber
20F-25	Torch Pkg. 250 Amp 25', Flex-Head, Vinyl
20F-25-R	Torch Pkg. 250 Amp 25', Flex-Head, Rubber

Part #	Description
20P	Torch Body, 250 Amp Pencil 180°
20P-12	Torch Pkg. 250 Amp 12.5', 180°, Vinyl
20P-12-R	Torch Pkg. 250 Amp 12.5', 180°, Rubber
20P-25	Torch Pkg. 250 Amp 25', 180°, Vinyl
20P-25-R	Torch Pkg. 250 Amp 25', 180°, Rubber
20V	Torch Body, 250 Amp w/ Valve
20V-12	Torch Pkg. 250 Amp 12.5', w/ Valve, Vinyl
20V-12-R	Torch Pkg. 250 Amp 12.5', w/ Valve, Rubber
20V-25	Torch Pkg. 250 Amp 25', w/ Valve, Vinyl
20V-25-R	Torch Pkg. 250 Amp 25', w/ Valve, Rubber

20FV	Torch Body, 250 Amp Flex-Head w/ Valve
20FV-12	Torch Pkg. 250 Amp 12.5', Flex-Head w/ Valve, Vinyl
20FV-12-R	Torch Pkg. 250 Amp 12.5', Flex-Head w/ Valve, Rubber
20FV-25	Torch Pkg. 250 Amp 25', Flex-Head w/ Valve, Vinyl
20FV-25-R	Torch Pkg. 250 Amp 25', Flex-Head w/ Valve, Rubber

Standard Set-Up



Optional Nozzles



Small Gas Lens Set-Up



Large Stubby Gas Lens Set-Up



Electrode Diameter			.020" (0.5mm)	.040" (1.0mm)	1/16" (1.6mm)	3/32" (2.4mm)	1/8" (3.2mm)	5/32" (4.0mm)
Nozzle Size	#	#3 (3/16")	#4 (1/4")	#5 (5/16")	#6 (3/8")	#7 (7/16")	#8 (1/2")	#10 (5/8")
Standard Set-Up								
Gasket Insulator	6		598882	598882	598882	598882	598882	
Collet	20		13N20	13N21	13N22	13N23	13N24	
Collet Body	21		13N25	13N26	13N27	13N28	13N29	
Alumina Nozzle	22		13N08	13N09	13N10	13N11	13N12	13N13
Alumina Nozzle Long	23	A796F70	A796F71	A796F72	A796F73			
Alumina Nozzle Extra Long	24	A796F74	A796F75	A796F76	A796F77			
Small Gas Lens Set-Up								
Gasket Insulator	6		598882	598882	598882	598882	598882	
Gas Lens	30		45V41	45V42	45V43	45V44	45V45	
Alumina Nozzle, Gas Lens	31		53N58	53N59	53N60	53N61	53N61S	
Large Stubby Gas Lens Set-Up								
Gasket Insulator	32		54N63-20	54N63-20	54N63-20	54N63-20	54N63-20	
Collet, Lg. Gas Lens	33		13N20L	13N21L	13N22L	13N23L	13N24L	
Lg. Gas Lens	34		45V0204S	45V0204S	45V116S	45V64S	995795S	
Alumina Nozzle, Lg. Gas Lens	35				57N75		57N74	53N88
							#12 (3/4")	53N87
							#15 (15/16")	53N89

22 Series TIG Torch

250 AMP Water-Cooled

#	Part #	Description
1	22A	Torch Body, 7"
1a	22-8A	Barrel, 7"
2	22B	Torch Body, 3"
2a	22-8B	Barrel, 3"
3	22-9	Insulating Boot
4	22-10	Gasket/Insulator
5	22-7	Collet Knob
6	CC-3-10	Cable Cover, 3"x10'
	CC-3-22	Cable Cover, 3"x22'
	CC-4-10	Cable Cover, 4"x10'
	CC-4-22	Cable Cover, 4"x22'
7	45V03R-3	Power Cable, 3' Rubber
	45V03R-6	Power Cable, 6' Rubber
	45V03R	Power Cable, 12.5' Rubber
	45V04R	Power Cable, 25' Rubber
8	45V07R-3	Water Hose, 3' Rubber
	45V07R-6	Water Hose, 6' Rubber
	45V07R	Water Hose, 12.5' Rubber
	45V08R	Water Hose, 25' Rubber
9	45V09R-3	Gas Hose, 3' Rubber
	45V09R-6	Gas Hose, 6' Rubber
	45V09R	Gas Hose, 12.5' Rubber
	45V10R	Gas Hose, 25' Rubber
10	See Chart	Collet
11	See Chart	Collet
12	See Chart	Collet Body
13	See Chart	Gas Lens Collet Body
14	See Chart	Nozzle
15	See Chart	Nozzle
16	See Chart	Nozzle, Long
17	See Chart	Nozzle, Extra Long
18	DA-1820L	Dinse 50mm, w/ 18" Water Hose
19	45V11	Power Cable Adapter



22 Series Torch Packages, 250 Amp

Part #	Description
22A	Machine Torch 7", 250 Amp
22A-3	Torch Pkg. 250 Amp 3' Rubber, 180° 7" Body
22A-6	Torch Pkg. 250 Amp 6' Rubber, 180° 7" Body
22A-12	Torch Pkg. 250 Amp 12.5' Rubber, 180° 7" Body
22A-25	Torch Pkg. 250 Amp 25' Rubber, 180° 7" Body

Part #	Description
22B	Machine Torch 3", 250 Amp
22B-3	Torch Pkg. 250 Amp 3' Rubber, 180° 3" Body
22B-6	Torch Pkg. 250 Amp 6' Rubber, 180° 3" Body
22B-12	Torch Pkg. 250 Amp 12.5' Rubber, 180° 3" Body
22B-25	Torch Pkg. 250 Amp 25' Rubber, 180° 3" Body

Standard Set-Up



Optional Nozzles



Small Gas Lens Set-Up



Large Stubby Gas Lens Set-Up



Electrode Diameter			.020" (0.5mm)	.040" (1.0mm)	1/16" (1.6mm)	3/32" (2.4mm)	1/8" (3.2mm)	5/32" (4.0mm)
Nozzle Size	#	#3 (3/16")	#4 (1/4")	#5 (5/16")	#6 (3/8")	#7 (7/16")	#8 (1/2")	#10 (5/8")
Standard Set-Up								
Collet 22A	10			22N21A	22N22A	22N23A	22N24A	
Collet 22B	11			22N21B	22N22B	22N23B	22N24B	
Collet Body	12		13N25	13N26	13N27	13N28	13N29	
Alumina Nozzle	15		13N08	13N09	13N10	13N11	13N12	13N13
Alumina Nozzle Long	16	A796F70	A796F71	A796F72	A796F73			
Alumina Nozzle Extra Long	17	A796F74	A796F75	A796F76	A796F77			
Small Gas Lens Set-Up								
Collet 22A	10			22N21A	22N22A	22N23A	22N24A	
Collet 22B	11			22N21B	22N22B	22N23B	22N24B	
Gas Lens	13			45V42	45V43	45V44	45V45	
Alumina Nozzle, Gas Lens	14		53N58	53N59	53N60	53N61	53N61S	
Large Stubby Gas Lens Set-Up								
Collet 22A, Lg. Gas Lens	20			22N21AL	22N22AL	22N23AL	22N24AL	
Collet 22B, Lg. Gas Lens	21			22N21BL	22N22BL	22N23BL	22N24BL	
Gasket Insulator	22			54N63-22	54N63-22	54N63-22	54N63-22	
Lg. Gas Lens	23			45V0204S	45V116S	45V64S	995795S	
Alumina Nozzle, Lg. Gas Lens	24				57N75		57N74	53N88
							53N87 (#12)	53N89 (#15)

24 Series TIG Torch

80 AMP Air-Cooled
180 AMP Water-Cooled

#	Part #	Description
1	24	Torch Body, Air-Cooled 60°
2	24N	Torch Body, Air-Cooled 90°
4	24W	Torch Body, Water-Cooled 60°
5	24W-90D	Torch Body, Water-Cooled 90°
6	53N22	Gasket/Insulator
8	53N04	Hose Clamp
9	CC-3-10 CC-3-22	Cable Cover, 3"x10' Cable Cover, 3"x22'
10	Model 24 56Y38R 56Y97R	Power Cable, 12.5' Rubber Power Cable, 25' Rubber
11	Model 24W 45V03R 45V04R	Power Cable, 12.5' Rubber Power Cable, 25' Rubber
12	45V07R 45V08R	Water Hose, 12.5' Rubber Water Hose, 25' Rubber
13	45V09R 45V10R	Gas Hose, 12.5' Rubber Gas Hose, 25' Rubber
14	45V03 45V04	Power Cable, 12.5' Vinyl Power Cable, 25' Vinyl
15	45V07 45V08	Water Hose, 12.5' Vinyl Water Hose, 25' Vinyl
16	45V09 45V10	Gas Hose, 12.5' Vinyl Gas Hose, 25' Vinyl
17	See Chart	Collet
18	See Chart	Collet Body
19	See Chart	Nozzle
20	See Chart	Nozzle
21	H-100R	Handle, Ribbed
22	H-100	Handle, Textured
23	DI-24F	Dinse 50mm, In-Line Gas Hole
24	DA-1820L	Dinse 50mm, w/ 18" Water Hose
25	53N43	Power Cable Adapter
26	45V11	Power Cable Adapter



24 Series Torch Packages, 80-180 Amp


Part #	Description
24	Torch Body, 80 Amp 60°, Air-Cooled
24-12-R	Torch Pkg. 80 Amp 60°, 12.5', Rubber
24-25-R	Torch Pkg. 80 Amp 60°, 25', Rubber
24N	Torch Body, 80 Amp 90°, Air-Cooled
24N-12-R	Torch Pkg. 80 Amp 90°, 12.5', Rubber
24N-25-R	Torch Pkg. 80 Amp 90°, 25', Rubber

Part #	Description
24W	Torch Body, 180 Amp 60°, Water-Cooled
24W-12	Torch Pkg. 180 Amp 60°, 12.5', Vinyl
24W-12-R	Torch Pkg. 180 Amp 60°, 12.5', Rubber
24W-25	Torch Pkg. 180 Amp 60°, 25', Vinyl
24W-25-R	Torch Pkg. 180 Amp 60°, 25', Rubber
24WN	Torch Body, 180 Amp 90°, Water-Cooled
24WN-12	Torch Pkg. 180 Amp 90°, 12.5', Vinyl
24WN-12-R	Torch Pkg. 180 Amp 90°, 12.5', Rubber
24WN-25	Torch Pkg. 180 Amp 90°, 25', Vinyl
24WN-25-R	Torch Pkg. 180 Amp 90°, 25', Rubber

Standard Set-Up



Small Gas Lens Set-Up

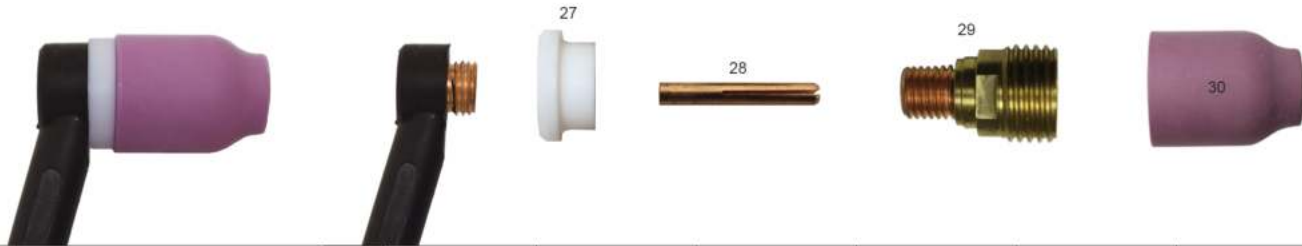

Electrode Diameter			.020" (0.5mm)	.040" (1.0mm)	1/16" (1.6mm)	3/32" (2.4mm)	1/8" (3.2mm)
Nozzle Size	#	#3 (3/16")	#4 (1/4")	#5 (5/16")	#6 (3/8")	#7 (7/16")	#8 (1/2")
Standard Set-Up							
Collet	17		53N15	53N16	53N14	24C332	
Collet Body	18		53N17	53N18	53N19	24CB332	
Alumina Nozzle	19	53N23A	53N24A	53N25A	53N27A		
Alumina Nozzle Long	20		53N28A		53N26A		
Small Gas Lens Set-Up							
Gasket Insulator	27		53N66	53N66	53N66	53N66	53N66
Collet, Gas Lens	28		53N62	53N63	53N64	24GLC332	
Gas Lens	29		45V41	45V42	45V43	45V44	
Alumina Nozzle, Gas Lens	30		53N58	53N59	53N60	53N61	53N61S

26 Series TIG Torch

200 AMP Air-Cooled

#	Part #	Description
1	26	Torch Body
2	26V	Torch Body, w/ Valve
3	26F	Torch Body, Flex Head
4	26FV	Torch Body, Flex w/ Valve
5	18CG	Gasket/Insulator
6	18-7	Back Insulator
7	57Y02	Back Cap, Long
8	300M	Back Cap, Medium
9	57Y04	Back Cap, Short
10	98W18	O-Ring, Back Cap
11	VS-1	Valve Stem
12	CC-4-10	Cable Cover, 4"x10'
	CC-4-22	Cable Cover, 4"x22'
13	46V28-2	Power Cable, 12.5' 2 pc
	46V30-2	Power Cable, 25' 2 pc
14	46V28R	Power Cable, 12.5' Rubber
	46V30R	Power Cable, 25' Rubber
15	See Chart	Collet
16	See Chart	Collet Body
17	See Chart	Nozzle
18	See Chart	Nozzle
19	H-200	Handle, Textured
20	H-200R	Handle, Ribbed
21	DA-26R	Dinse 50mm, w/ 18" Gas Hose
22	DI-26F	Dinse 50mm, w/ In-Line Gas Hole*
	DI-26R	Dinse 50mm, w/In-Line Gas - Std.
23	45V62	Power Cable Adapter



*Special Power Cable Required

26 Series Torch Packages, 200 Amp

Part #	Description	Part #	Description
26	Torch Body, 200 Amp	26V	Torch Body, 200 Amp w/ Valve
26-12-2	Torch Pkg. 200 Amp 12.5', 2 Pc.	26V-12-2	Torch Pkg. 200 Amp 12.5', w/ Valve, 2 Pc.
26-12-R	Torch Pkg. 200 Amp 12.5', Rubber	26V-12-R	Torch Pkg. 200 Amp 12.5', w/ Valve, Rubber
26-25-2	Torch Pkg. 200 Amp 25', 2 Pc.	26V-25-2	Torch Pkg. 200 Amp 25', w/ Valve, 2 Pc.
26-25-R	Torch Pkg. 200 Amp 25', Rubber	26V-25-R	Torch Pkg. 200 Amp 25', w/ Valve, Rubber
26F	Torch Body, 200 Amp Flex-Head		
26F-12-2	Torch Pkg. 200 Amp 12.5', Flex-Head, 2 Pc.		
26F-12-R	Torch Pkg. 200 Amp 12.5', Flex-Head, Rubber		
26F-25-2	Torch Pkg. 200 Amp 25', Flex-Head, 2 Pc.		
26F-25-R	Torch Pkg. 200 Amp 25', Flex-Head, Rubber		
26FV	Torch Body, 200 Amp Flex-Head w/ Valve		
26FV-12-2	Torch Pkg. 200 Amp 12.5', Flex-Head w/ Valve, 2 Pc.		
26FV-12-R	Torch Pkg. 200 Amp 12.5', Flex-Head w/ Valve, Rubber		
26FV-25-2	Torch Pkg. 200 Amp 25', Flex-Head w/ Valve, 2 Pc.		
26FV-25-R	Torch Pkg. 200 Amp 25', Flex-Head w/ Valve, Rubber		

Standard Set-Up



Medium Gas Lens Set-Up



Large Gas Lens Set-Up



Stubby Collet Body Set-Up



Electrode Diameter		.020" (0.5mm)	.040" (1.0mm)	1/16" (1.6mm)	3/32" (2.4mm)	1/8" (3.2mm)	5/32" (4.0mm)	
Nozzle Size	#	#4 (1/4")	#5 (5/16")	#6 (3/8")	#7 (7/16")	#8 (1/2")	#10 (5/8")	#12 (3/4")
Standard Set-Up								
Gasket Insulator	5	18CG	18CG	18CG	18CG	18CG	18CG	
Collet	15	10N21	10N22	10N23	10N24	10N25	54N20	
Collet Body	16	10N29	10N30	10N31	10N32	10N28	406488	
Alumina Nozzle	17	10N50	10N49	10N48	10N47	10N46	10N45	10N44
Alumina Nozzle Long	18		10N49L	10N48L	10N47L			
Medium Gas Lens Set-Up								
Gasket Insulator	24	54N01	54N01	54N01	54N01	54N01	54N01	
Gas Lens	25	45V29	45V24	45V25	45V26	45V27	45V28	
Alumina Nozzle, Gas Lens	26	54N18	54N17	54N16	54N15	54N14	54N19	
Alumina Nozzle Long, Gas Lens	27		54N17L	54N16L	54N15L	54N14L		
Large Stubby Gas Lens Set-Up								
Gasket Insulator	28	54N63	54N63	54N63	54N63	54N63	54N63	
Lg. Gas Lens	29	45V0204	45V0204	45V116	45V64	995795	45V63	53N87 (#12)
Alumina Nozzle, Lg. Gas Lens	30			57N75		57N74	53N88	53N89 (#15)
Alumina Nozzle Long, Lg. Gas Lens				57N75L		57N74L	53N88L	53N87L
Alumina Nozzle Extra Long, Lg. Gas Lens				57N75XL		57N74XL	53N88XL	53N87XL
Stubby Collet Body Set-Up								
Gasket Insulator	31	18CG20	18CG20	18CG20	18CG20	18CG20		
Stubby Collet	32	10N21S	10N22S	10N23S	10N24S	10N25S		
Stubby Collet Body	33	17CB20	17CB20	17CB20	17CB20	17CB20		
Alumina Nozzle	34	13N08	13N09	13N10	13N11	13N12	13N13	

12 Series TIG Torch

500 AMP Water-Cooled

#	Part #	Description					
1	12	Torch Body					
2	12NG	Gasket/Insulator					
3	12GLG	Gasket/Insulator, for Gas Lens					
4	56Y44	Back Cap, Long					
5	56Y45	Back Cap, Short					
6	40V84R	Power Cable, 12.5' Rubber					
	40V84RL	Power Cable, 25' Rubber					
7	40V83R	Water Hose, 12.5' Rubber					
	40V83RL	Water Hose, 25' Rubber					
8	40V82R	Gas Hose, 12.5' Rubber					
	40V82RL	Gas Hose, 25' Rubber					
9	See Chart	Collet					
10	See Chart	Collet Body					
11	See Chart	Nozzle					
12	See Chart	Gas Lens Collet Body					
13	See Chart	Nozzle					
14	85WP13	Handle					
15	CC-4-10	Cable Cover, 4"x10'					
	CC-4-22	Cable Cover, 4"x22'					
16	45V11	Power Cable Adapter					

12 Series Torch Packages, 500 Amp

Part #	Description
12	Torch Body, 500 Amp
12-12	Torch Pkg. 500 Amp 12.5', Rubber

Part #	Description
12	Torch Body, 500 Amp
12-25	Torch Pkg. 500 Amp 25', Rubber

Electrode Diameter		1/16" (1.6mm)	3/32" (2.4mm)	1/8" (3.2mm)	5/32" (4.0mm)	3/16" (4.8mm)	1/4" (6.4mm)
Nozzle Size	#	#4 (1/4")	#5 (5/16")	#6 (3/8")	#7 (7/16")	#8 (1/2")	#10 (5/8")
Standard Set-Up							#12 (3/4")
Collet	9	85Z14	85Z15	85Z16	85Z17	85Z18	85Z19
Collet Body	10	11WP65	11WP65	11WP65	11WP65	11WP65	11WP65
Nozzle	11	14N57	14N58	14N59	14N60	14N61	14N61-10
Gas Lens Set-Up							14N61-12
Gas Lens	12	11GL16	11GL32	11GL18	11GL53	11GL36	
Alumina Nozzle	13			57N75		57N74	53N88 (#10)
Alumina Nozzle Long				57N75L		57N74L	53N87 (#12)
Alumina Nozzle Extra Long				57N75XL		57N74XL	53N89 (#15)

27 Series TIG Torch

500 AMP Water-Cooled

#	Part #	Description
1	27A	Machine Torch Body, 9"
2	27B	Machine Torch Body, 20"
3	27-10A	Barrel Body, 9"
4	27-10B	Barrel Body, 20"
5	27-19	Nylon Screw
6	27-13A	Shaft Assembly (27A)
7	27-13B	Shaft Assembly (27B)
8	27-13-2	O-Ring (outer)
9	27-13-3	O-Ring (inner)
10	27-12	Insulating Boot
11	See Chart	Collet
12	See Chart	Gas Lens Collet Body
13	181W89	O-Ring, Gas Lens Collet Body
14	57N56	Gasket
15	See Chart	Nozzle
16	40V84R-3	Power Cable, 3' Rubber
17	40V84R	Power Cable, 12.5' Rubber
18	40V84RL	Power Cable, 25' Rubber
19	40V83R-3	Water Hose, 3' Rubber
20	40V83R	Water Hose, 12.5' Rubber
21	40V83RL	Water Hose, 25' Rubber
22	40V82R-3	Gas Hose, 3' Rubber
23	40V82R	Gas Hose, 12.5' Rubber
24	40V82RL	Gas Hose, 25' Rubber
25	CC-4-10	Cable Cover, 4"x10'
26	CC-4-22	Cable Cover, 4"x22'
27	45V11	Power Cable Adapter



27 Series Torch Packages, 500 Amp

Part #	Description
27A	Machine Torch 9", 500 Amp
27A-3	Torch Pkg. 500 Amp 3' Rubber, 180° 9" Body
27A-12	Torch Pkg. 500 Amp 12.5' Rubber, 180° 9" Body
27A-25	Torch Pkg. 500 Amp 25' Rubber, 180° 9" Body

Part #	Description
27B	Machine Torch 20", 500 Amp
27B-3	Torch Pkg. 500 Amp 3' Rubber, 180° 20" Body
27B-12	Torch Pkg. 500 Amp 12.5' Rubber, 180° 20" Body
27B-25	Torch Pkg. 500 Amp 25' Rubber, 180° 20" Body

Electrode Diameter		.040" (1.0mm)	1/16" (1.6mm)	3/32" (2.4mm)	1/8" (3.2mm)	.5/32" (4.0mm)	3/16" (4.8mm)	1/4" (6.4mm)
Nozzle Size	#	#5 (5/16")	#6 (3/8")	#7 (7/16")	#8 (1/2")	#10 (5/8")	#12 (3/4")	#15 (15/16")
Standard Set-Up								
Collet	10	57N45	57N46	57N47	57N48	57N49	57N50	57N51
Gas Lens	11	49V22	49V23	49V24	49V25	49V26	49V27	49V28
Alumina Nozzle	14		57N75		57N74	53N88	53N87	53N89
Alumina Nozzle Long			57N75L		57N74L	53N88L	53N87L	
Alumina Nozzle Extra Long			57N75XL		57N74XL	53N88XL	53N87XL	
Alumina Nozzle Extra Extra Long			57N75XXL		57N74XXL	53N88XXL	53N87XXL	

25 Series TIG Torch

200 AMP Water-Cooled

#	Part #	Description		
1	25	Torch Body, Flex Pencil 180°		
2	598882	Gasket/Insulator		
3	53N06	Handle, Textured		
4	53N06R	Handle, Ribbed		
5	45V03R	Power Cable, 12.5' Rubber		
	45V04R	Power Cable, 25' Rubber		
6	45V07R	Water Hose, 12.5' Rubber		
	45V08R	Water Hose, 25' Rubber		
7	45V09R	Gas Hose, 12.5' Rubber		
	45V10R	Gas Hose, 25' Rubber		
8	45V03	Power Cable, 12.5' Vinyl		
	45V04	Power Cable, 25' Vinyl		
9	45V07	Water Hose, 12.5' Vinyl		
	45V08	Water Hose, 25' Vinyl		
10	45V09	Gas Hose, 12.5' Vinyl		
	45V10	Gas Hose, 25' Vinyl		
11	CC-3-10	Cable Cover, 3"x10'		
	CC-3-22	Cable Cover, 3"x22'		
12	53N04			
13	See Chart	Collet		
14	See Chart	Collet Body		
15	See Chart	Nozzle		
16	See Chart	Nozzle		
17	See Chart	Nozzle		
18	DA-1820L	Dinse 50mm, w/ 18" Water Hose		
19	45V11	Power Cable Adapter		

25 Series Torch Packages, 200 Amp

Part #	Description	Part #	Description
25	Torch Body, 200 Amp Flex Pencil 180°	25	Torch Body, 200 Amp Flex Pencil 180°
25-12	Torch Pkg. 200 Amp 12.5' Flex Pencil 180°, Vinyl	25-25	Torch Pkg. 200 Amp 25' Flex Pencil 180°, Vinyl
25-12-R	Torch Pkg. 200 Amp12.5' Flex Pencil 180°, Rubber	25-25-R	Torch Pkg. 200 Amp 25' Flex Pencil 180°, Rubber

Electrode Diameter			.020" (0.5mm)	.040" (1.0mm)	1/16" (1.6mm)	3/32" (2.4mm)	1/8" (3.2mm)	5/32" (4.0mm)
Nozzle Size	#	#3 (3/16")	#4 (1/4")	#5 (5/16")	#6 (3/8")	#7 (7/16")	#8 (1/2")	#10 (5/8")
Collet	13		13N20	13N21	13N22	13N23	13N24	
Collet Body	14		13N25	13N26	13N27	13N28	13N29	
Alumina Nozzle	15		13N08	13N09	13N10	13N11	13N12	13N13
Alumina Nozzle Long	16	A796F70	A796F71	A796F72	A796F73			
Alumina Nozzle Extra Long	17	A796F74	A796F75	A796F76	A796F77			

Accessory Kits

AK-1

for use on torches:

9, 20, 22, 25

Kit Includes:

- 2 Tungsten, 7" - (.040"), (1/16")
- 3 Alumina Nozzles - 13N08 (#4), 13N09 (#5), 13N10 (#6)
- 2 Collet Bodies - 13N26 (.040"), 13N27 (1/16")
- 2 Collets - 13N21 (.040"), 13N22 (1/16")
- 1 Back Cap - 41V24 (Long)



AK-2

for use on torches:

17, 18, 26

Kit Includes:

- 3 Tungsten, 7" - (.040"), (1/16"), (3/32")
- 3 Alumina Nozzles - 10N50 (#4), 10N49 (#5), 10N48 (#6)
- 3 Collet Bodies - 10N29 (.040"), 10N30 (1/16"), 10N31 (3/32")
- 3 Collets - 10N21 (.040"), 10N22 (1/16"), 10N23 (3/32")
- 1 Back Cap - 57Y04 (Short)



AK-3

for use on torches:

17, 18, 26

Kit Includes:

- 3 Tungsten, 7" - (1/16"), (3/32"), (1/8")
- 3 Alumina Nozzles - 10N49 (#5), 10N48 (#6), 10N46 (#8)
- 3 Collet Bodies - 10N30 (1/16"), 10N31 (3/32"), 10N28 (1/8")
- 3 Collets - 10N22 (1/16"), 10N23 (3/32"), 10N25 (1/8")
- 1 Back Cap - 57Y04 (Short)



AK-4

for use on torches:

9, 20, 22, 25

Kit Includes:

- 3 Tungsten, 7" - (1/16"), (3/32"), (1/8")
- 3 Alumina Nozzles - 13N09 (#5), 13N10 (#6), 13N11 (#7)
- 3 Collet Bodies - 13N27 (1/16"), 13N28 (3/32"), 13N29 (1/8")
- 3 Collets - 13N22 (1/16"), 13N23 (3/32"), 13N24 (1/8")
- 1 Back Cap - 41V24 (Long)



AK-5

for use on torches:

24, 24W

Kit Includes:

- 2 Tungsten, 7" - (.040"), (1/16")
- 3 Lava Nozzles - 53N24 (#4), 53N25 (#5), 53N27 (#6)
- 2 Collet Bodies - 53N18 (.040"), 53N19 (1/16")
- 2 Collets - 53N16 (.040"), 13N23 (1/16")



Stainless Steel Water Coolers



WC2500 Part #: 680-25-100 (115V) 680-25-102 (230V)

Specifications:

Dimensions:

18"L x 9-1/4"W x 12-3/8"H
(45.8 cm x 23.5 cm x 31.4 cm)

Reservoir:

2 Gallon Capacity

Pump Capacity:

1.5 gpm (5.68 lpm) @ 50psi
1.8 gpm (5.68 lpm) @ 60psi
100 psi max.

Motor Voltage:

115V or 230VAC, Single Phase, 50/60 Hz

Amperage:

5.0/6.8, 2.5/3.4

Heat Exchanger:

High Efficiency, Copper Core, Rust Proof,
12,000 BTU

Water Connections:

5/8"-18 UNC Left-Handed Inert Gas Fitting

Net Weight: 35 lbs. (15.9 kg)

Dimensional Shipping Weight:

43 lbs. (19.5 kg)

Shipping Dimensions:

22"L x 15"W x 18"H
(558.8 cm x 381 cm x 457.2 cm)

WC3500 Part #: 690-25-100 (115V) 690-25-102 (230V)

Specifications:

Dimensions:

23"L x 11"W x 14 3/4"H
(58.4 cm x 27.9 cm x 37.5 cm)

Reservoir:

3 Gallon Capacity

Pump Capacity:

1.5 gpm (5.68 lpm) @ 50psi
1.8 gpm (5.68 lpm) @ 60psi
100 psi max.

Motor Voltage:

115V or 230VAC, Single Phase, 50/60 Hz

Amperage:

5.0/6.8, 2.5/3.4

Heat Exchanger:

High Efficiency, Copper Core, Rust Proof,
15,000 BTU

Water Connections:

5/8"-18 UNC Left-Handed Inert Gas Fitting

Net Weight: 45 lbs. (20.4 kg)

Dimensional Shipping Weight:

50 lbs. (22.7 kg)

Shipping Dimensions:

28"L x 16"W x 22"H
(711.2 cm x 406.4 cm x 558.8 cm)

CM INDUSTRIES[®] **INC.**

TIG TORCHES



CM INDUSTRIES, INC.
505 OAKWOOD RD. LAKE ZURICH, IL 60047
PH. 847-550-0033 FX. 847-550-0444
CMINDUSTRIES.COM EMAIL: SALES@CMINDUSTRIES.COM

CM INDUSTRIES

INC.

MANUFACTURER OF WELDING PRODUCTS



SCAN TO VIEW



CM Industries, Inc.
OFFICES - FACTORY - WAREHOUSE
505 Oakwood Rd. Lake Zurich, IL 60047 USA
ph: 847-550-0033 fx: 847-550-0444
Toll Free ph: 800-530-0032 Toll Free fx: 800-530-0575
email: sales@cmindustries.com www.cmindustries.com

COPYRIGHT © 2024 CM INDUSTRIES, INC. ALL RIGHTS RESERVED